


Bolt.Access

Bolt.W20

BOLT-W20

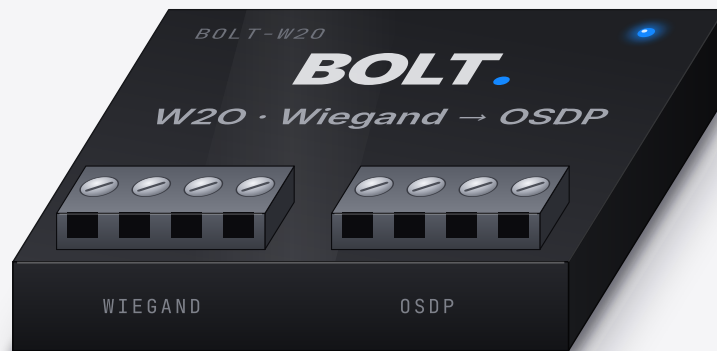

Wiegand in. OSDP out.

Fits behind the reader in the back box, powered from the RS-485 pair. Swap-outs without ripping out the readers, and the exposed run gets OSDP Secure Channel.

Changing system doesn't mean changing every reader.

- No new readers to buy.
- Hidden behind the reader.
- Encrypts the cable run.

SPECIFICATION

Part	BOLT-W20
Converts	Any Wiegand reader to an OSDP v2.2 device
Mounts	Behind the reader, in the back box
Power	From the RS-485 pair, no local PSU
Multi-drop	Up to 7 readers on one pair
Encryption	OSDP Secure Channel on the exposed run
Addressing	Automatic: the controller assigns it